


*Figure 1. Twin-screw extrusion process used to fabricate continuously graded particle-reinforced polymer composites.*

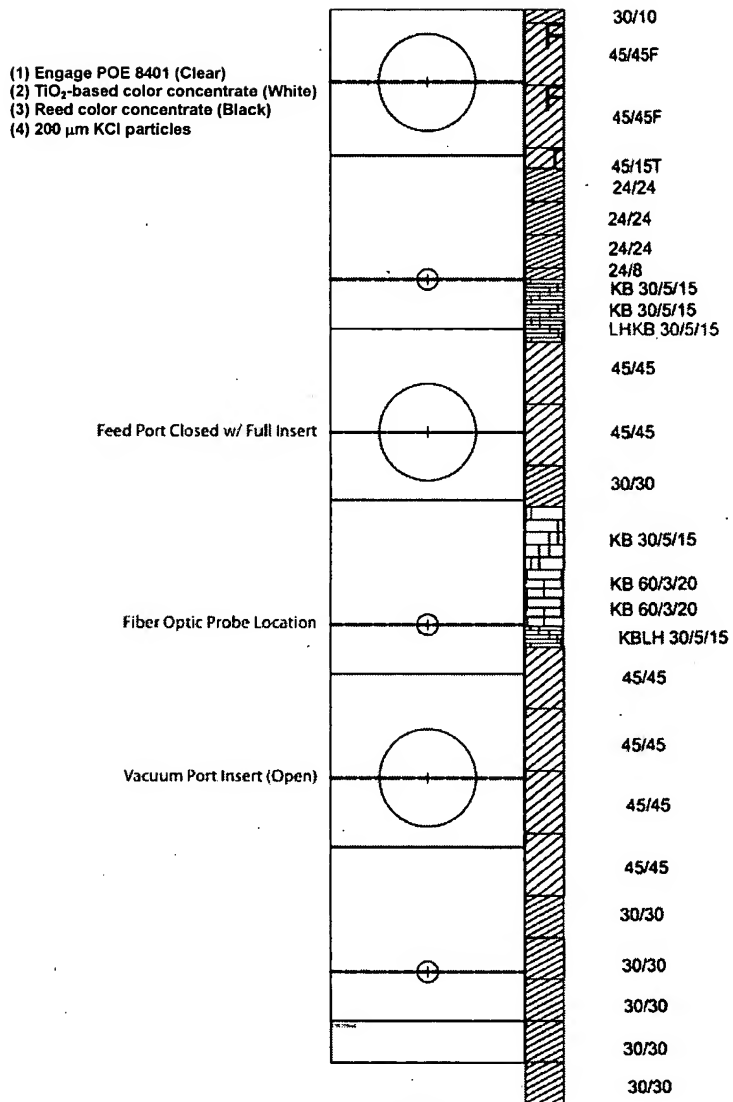

102

Figure 2. Screw configuration, feed locations, and probe locations used for the 28 mm TSE experiments.